
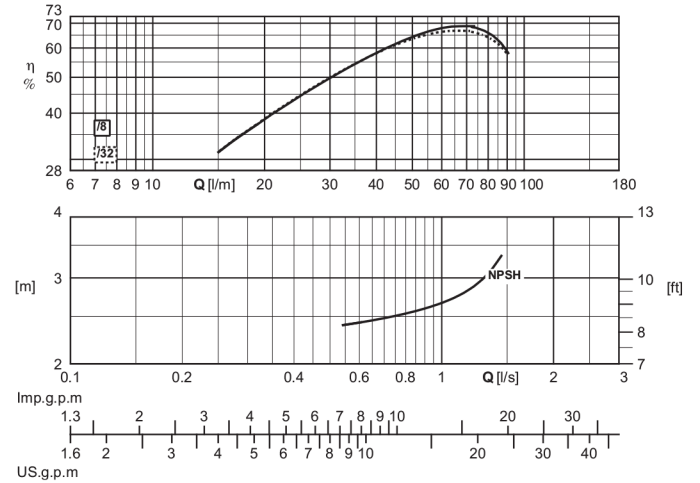


Type Type Tipo	Ø max	Weight Poids Peso	A	B	C	D	E	F
	[mm]							
E4XED30/5+MC405	98	9,9	628,5	308,5	320	93	96	G1 1/4
E4XED30/8+MC4075	98	11,7	723,5	383,5	340	93	96	G1 1/4
E4XED30/11+MC41	98	12,9	798,5	458,5	340	93	96	G1 1/4
E4XED30/16+MCH415	98	15,2	1003,5	583,5	420	93	96	G1 1/4
E4XED30/21+MCH42	98	17,2	1183	736	447	93	96	G1 1/4
E4XED30/32+MCK43	98	20,9	1486	1011	475	93	96	G1 1/4

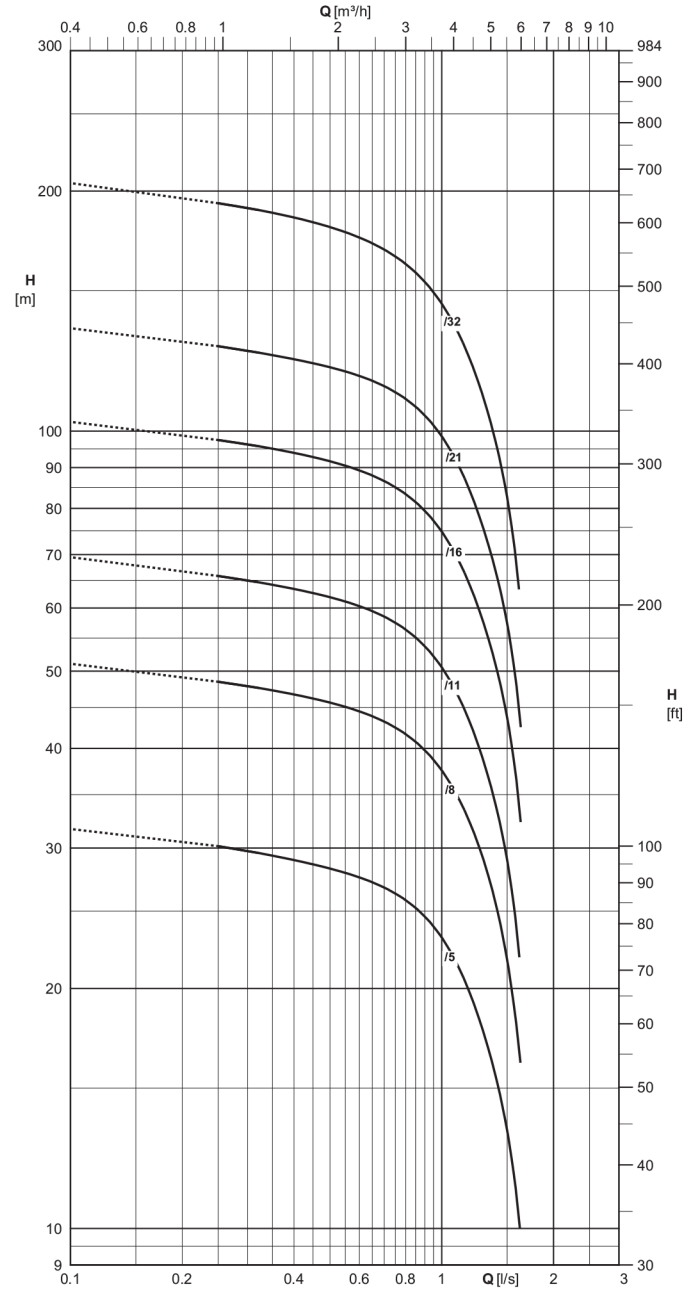

The hydraulic performance characteristics are guaranteed as conforming to standard UNI/ISO 9906 Grade 3B.

Les caractéristiques hydrauliques de fonctionnement sont garanties conformes à la norme UNI/ISO 9906 Niveau 3B.

Le caratteristiche di funzionamento vengono garantite secondo la norma: UNI/ISO 9906 Grado 3B.